


# Zeichungsrahmen veraltet. Bitte nicht mehr verwenden.

- (K) = Required mounting dimensions
- (H1) = Tightening torque of the screws  
M : 0.5 ± 0.03 Nm  
Screw: ISO 4762  
Screw property class 8.8  
Washer: ISO 7092-2.5-200HV  
Materially bonding anti-rotation lock necessary
- (H2) = Tightening torque of the screws  
M : 0.5 ± 0.13 Nm  
Screw: ISO 4762  
Screw property class 8.8  
Washer: ISO 7092-4-200HV  
Materially bonding anti-rotation lock necessary
- (H3) = 0° Position index ±5°
- (H4) = Customer is responsible for electrical shielding and support of connecting cable
- (H5) = Direction of shaft rotating for output signals as per the interface description
- (H6) = Required customer's mounting dimensions to transmit the maximum allowed loads as per the technical data
- (H7) = Optional recommended customer's mounting dimensions
- (H8) = Material of customer's parts: Steel  
Re ≥ 235 N/mm<sup>2</sup> Rm ≥ 400 N/mm<sup>2</sup>
- (H9) = Coefficient of thermal expansion  
(10 < α < 16) × 10<sup>-6</sup> /K
- (H10) = Required direction of axial forces

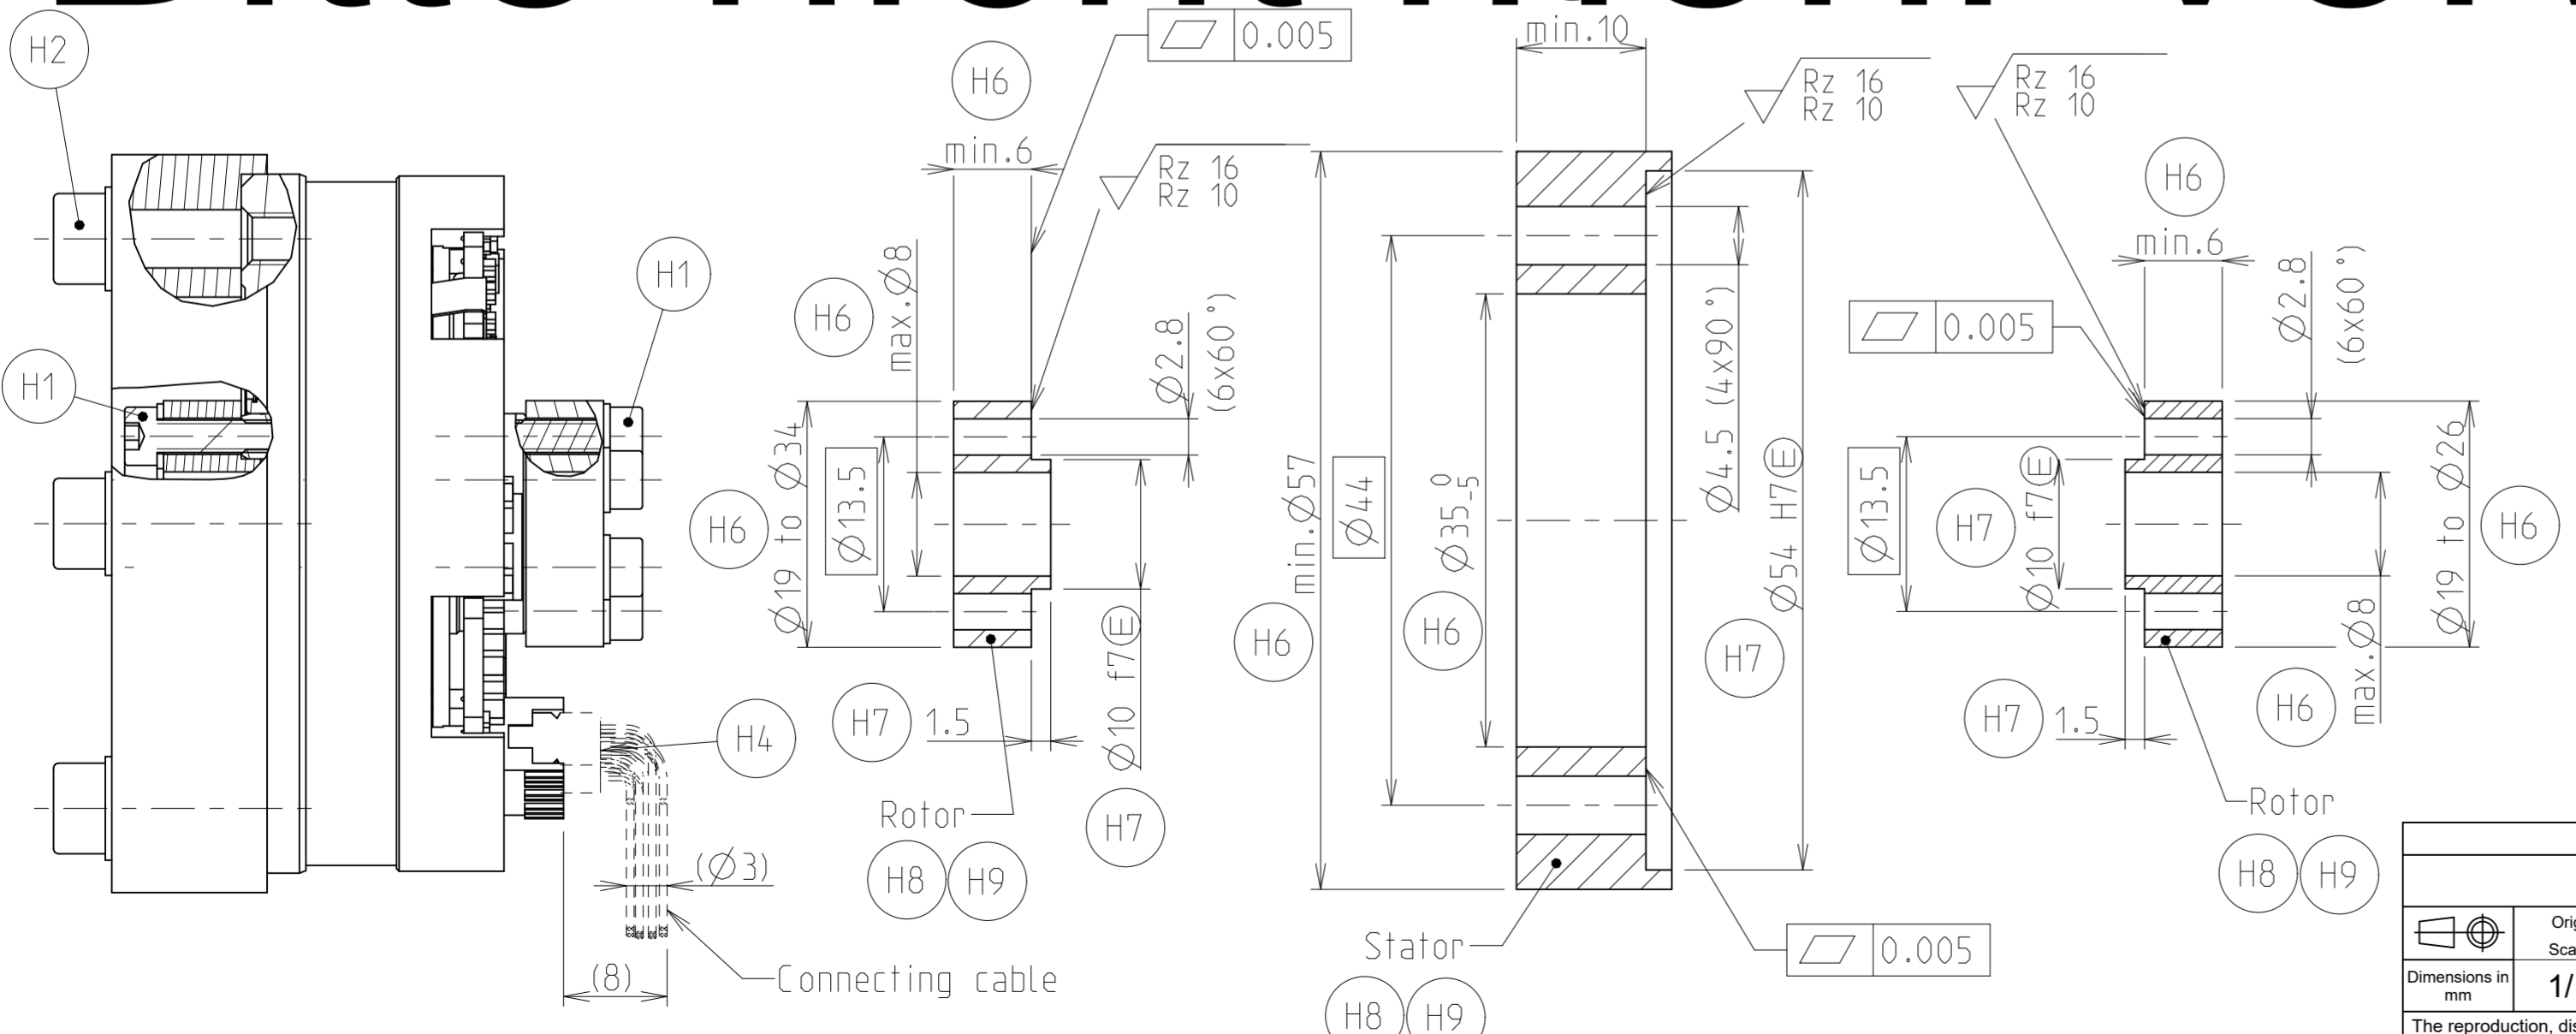

Original drawing		MRP 2010		ID number:
Scale	Format	MRP 2010		Change No. C021701-20
1/1	A2	Anschlussmaße / Mating Dimensions		Phase: Serie
Dimensions in mm				Tolerierung nach DIN ISO 8015
				Allgemeintol. ISO 2768-mH $\pm 0.2$
				General tol. ISO 2768-mH $\pm 0.2$
The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design. (ISO 16016)				
<b>HEIDENHAIN</b> DR. JOHANNES HEIDENHAIN GmbH 83301 Traunreut, Germany			Version   Revision   Sheet   Page	1 of 1
			D1079645-02-D-01	
			Document number	

18.01.2016