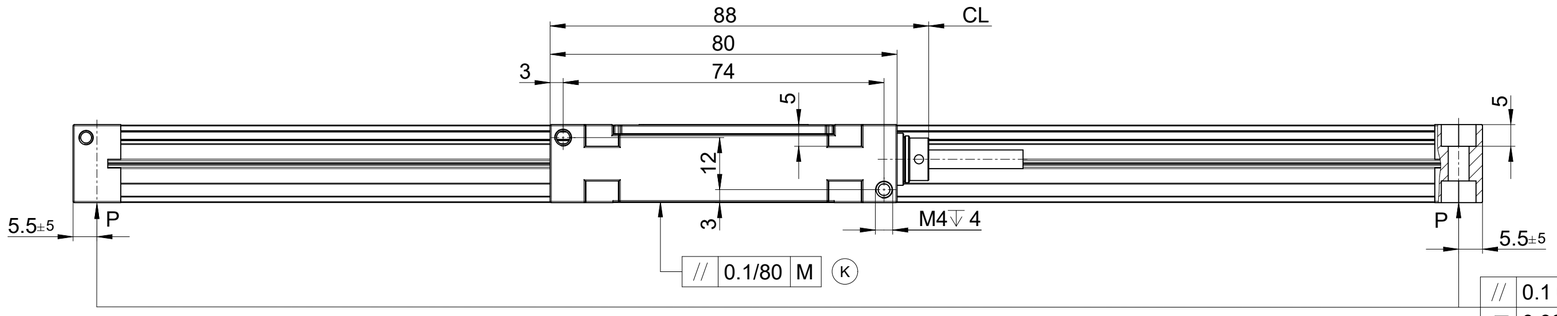

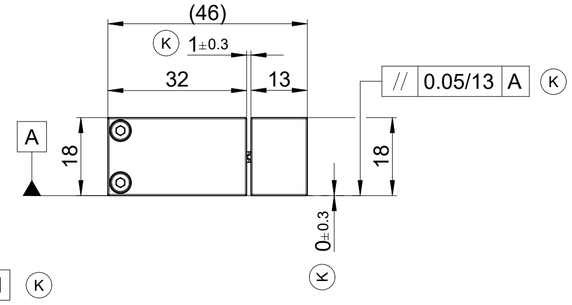

// 0.1 CZ M Ⓚ
▱ 0.03 CZ mounting surface / Anbaufläche

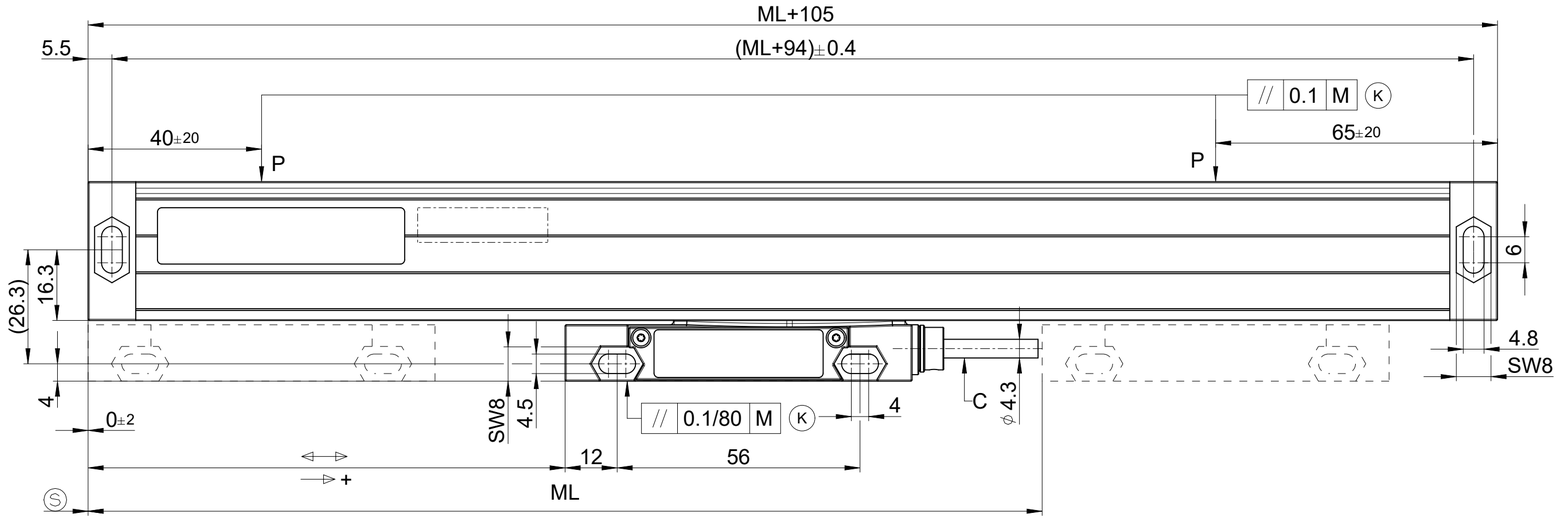

PUR cable in protective sleeve
Kabel PUR im Schutzschlauch

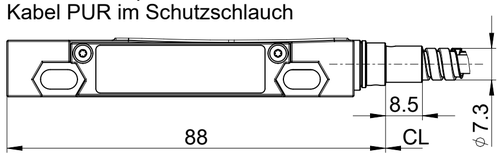

LS 477(C), LS 487(C)

Available as a replacement device on short notice
Als Ersatzgerät kurzfristig verfügbar

Dimensions of scanning unit are different
Abmessungen Abtasteinheit unterschiedlich

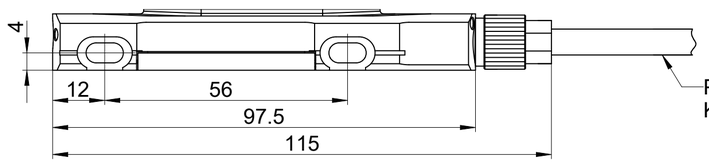



M = machine guideway / Maschinenführung
ML = measuring length / Messlänge
P = gauging points / Messpunkte
◁▷ = 0 ... ML
▷ + = direction of motion of the scannig unit for ascending position values
Bewegungsrichtung des Abtastkopfes für die steigenden Positionswerte
C = PUR cable / Anschlusskabel PUR
CL = cable length / Kabellänge
Ⓚ = required mating dimensions / kundenseitige Anbaumaße

Ⓢ = beginning of the measuring length ML / Beginn der Messlänge ML

LS3x3(C)
start value at version with distance-coded reference marks between 0 and 3200
Startwert bei Ausführung mit abstandscodierten Referenzmarken zwischen 0 und 3200

				ID number:
				Change No. C157360-19
				Phase: Serie
	Original drawing		LS 373(C), LS 383(C) LS 373(C), LS 383(C) Anschlussmaße / Mating Dimensions	Tolerances as per ISO 8015
Dimensions in mm	Scale 1:1	Format A2		General Tolerances ISO 2768:1989-mH ≦6mm:±0,2

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design. (ISO 16016)

HEIDENHAIN
DR. JOHANNES HEIDENHAIN GmbH
83301 Traunreut, Germany

Released	Version	Revision	Sheet	Page
30.10.2024	D1328652-04 - A-01			1 of 1
	Document number			

886 200 A2