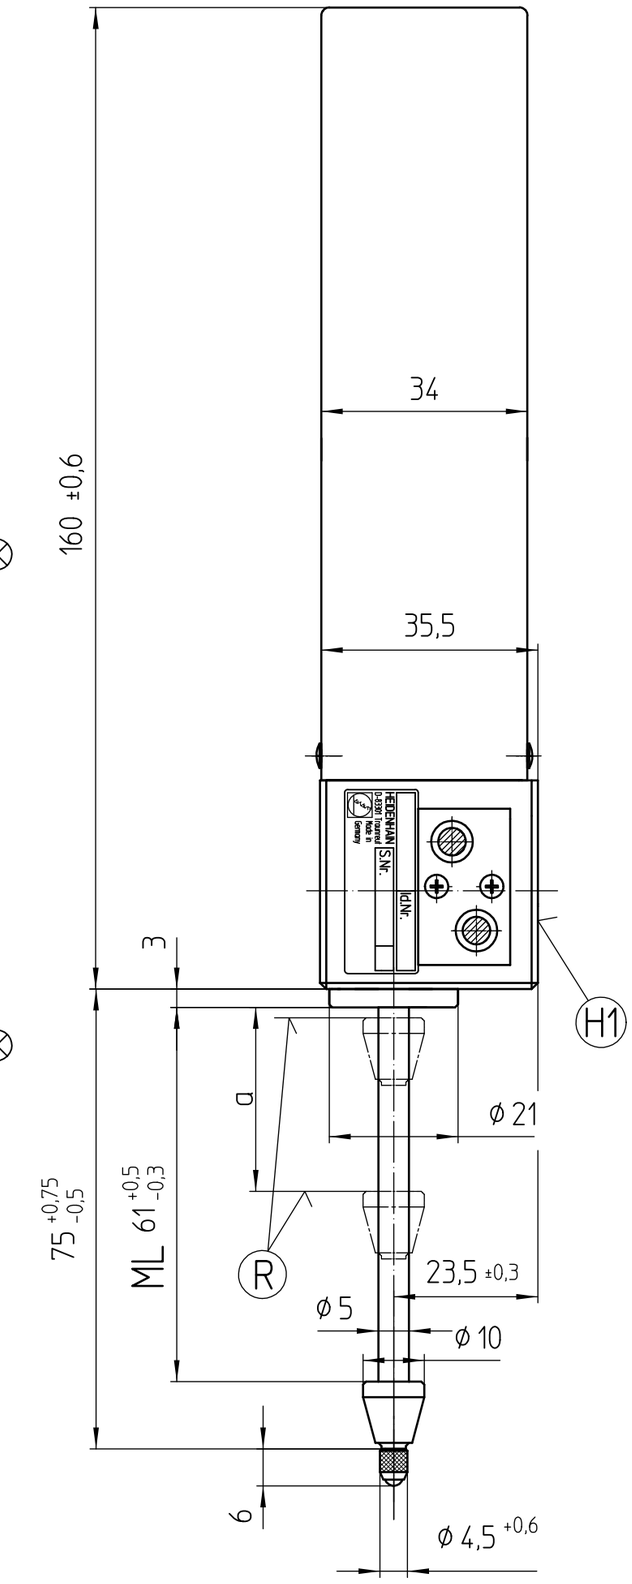

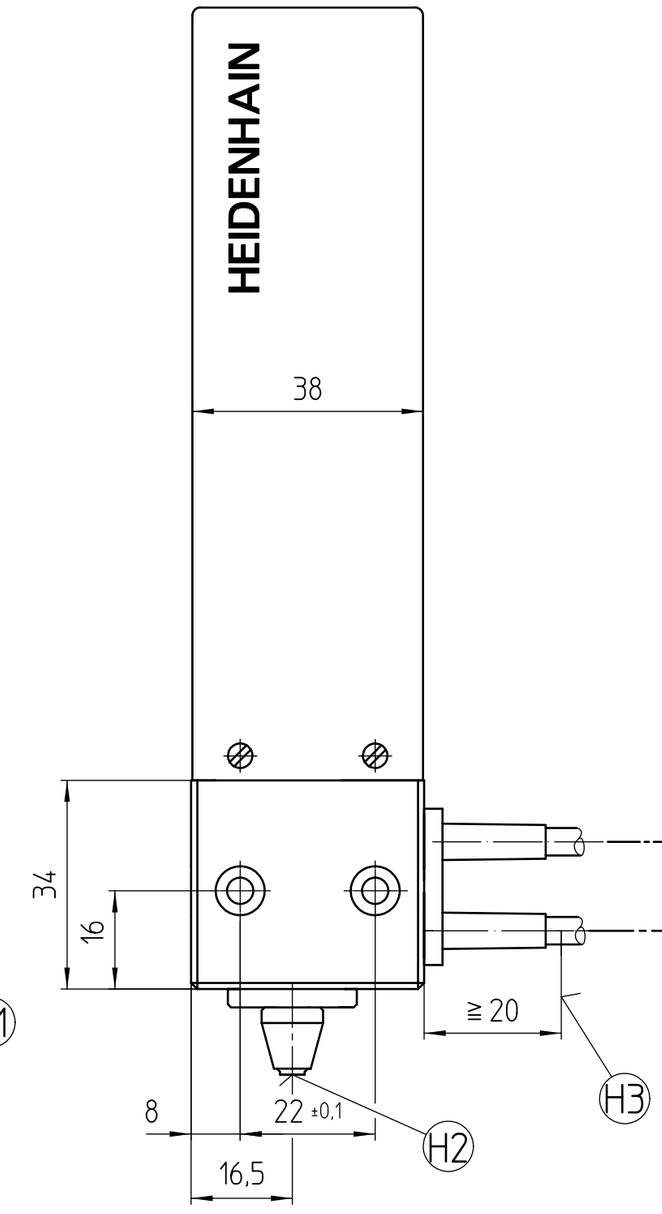

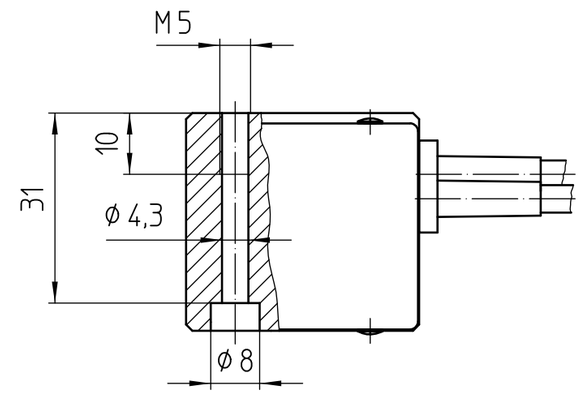

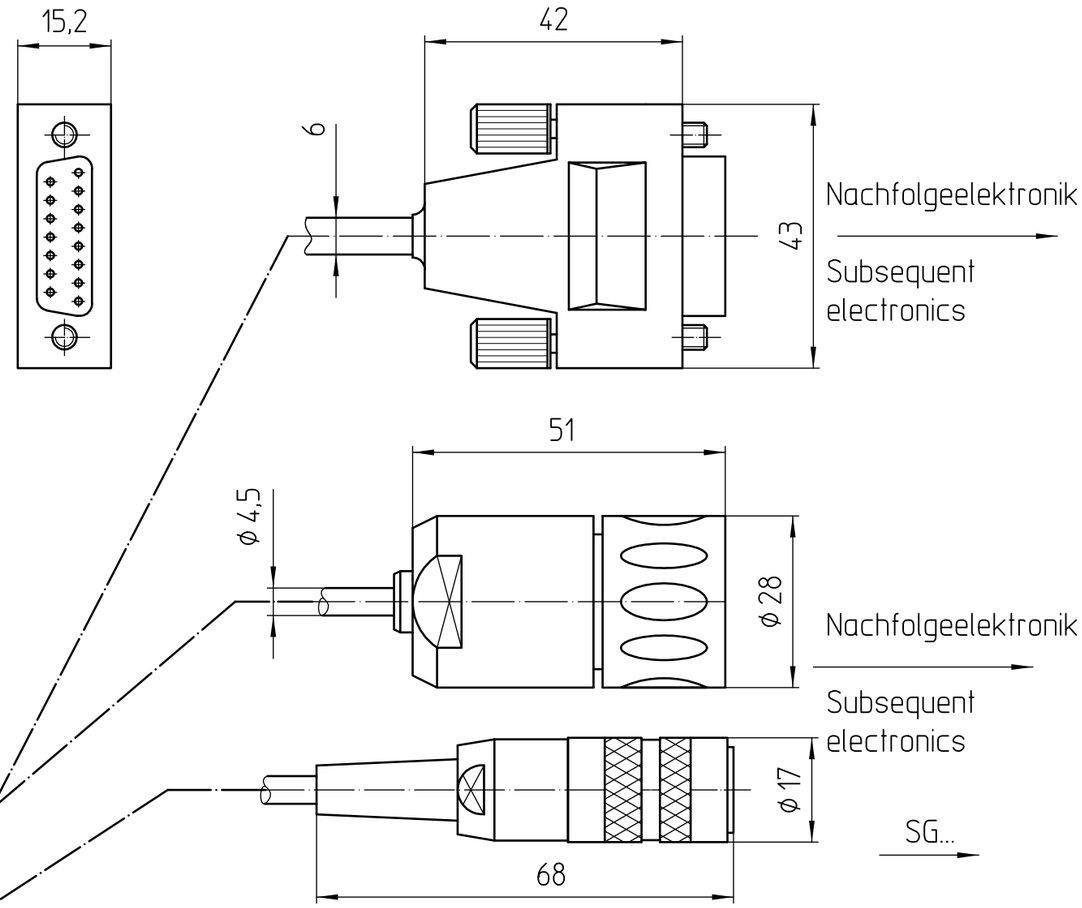

R = Referenzmarken-Lage — Reference mark position

H1 = Anlagefläche — Clamping area

H2 = M2,5/6 tief für Messeinsatz — M2,5/6 deep for measuring contact

H3 = Platzbedarf für Kabel — Clearance for cables

Stecker / Connector	a	Typ	IDnumber:
Sub-D	30±0,5	MT 60K	653251-01
	1,7±0,3	MT 60K	653250-01
	1,7±0,3	MT 60M	653249-01
M23	30±0,5	MT 60K	359341-04
	1,7±0,3	MT 60K	359341-02
	1,7±0,3	MT 60M	359341-01

Release number: N1046

Original drawing | Scale: 1:1 | Format: A3 | Dimensions in mm

MT 60

Anschlussmaße

Tolerierung nach DIN ISO 8015
Tolerances as per DIN ISO 8015

Allgemeintoleranzen ISO 2768-mH ≤6mm: +- 0,2
General tolerances ISO 2768-mH ≤6mm: +- 0,2

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design. (ISO 16016)

HEIDENHAIN
DR.JOHANNES HEIDENHAIN GmbH
83301 Traunreut, Germany

Version | Revision | Sheet

D 359356 - 03- A -01

Document number

1 of 1

886 200 A3