⌀D	Schnittstelle
⌀4,5	EnDat22, FANUC02, Mitsu02-4 mit Kupplung M12
⌀6	EnDat02, FANUC02, Mitsu02-4 mit Kupplung M23
⌀6	Inkremental (RON 2xx)

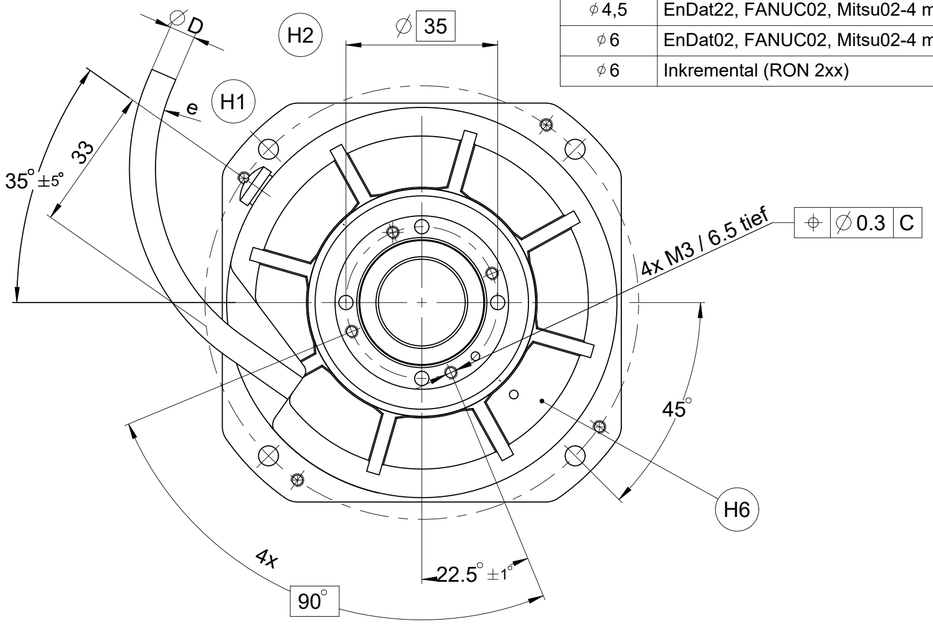

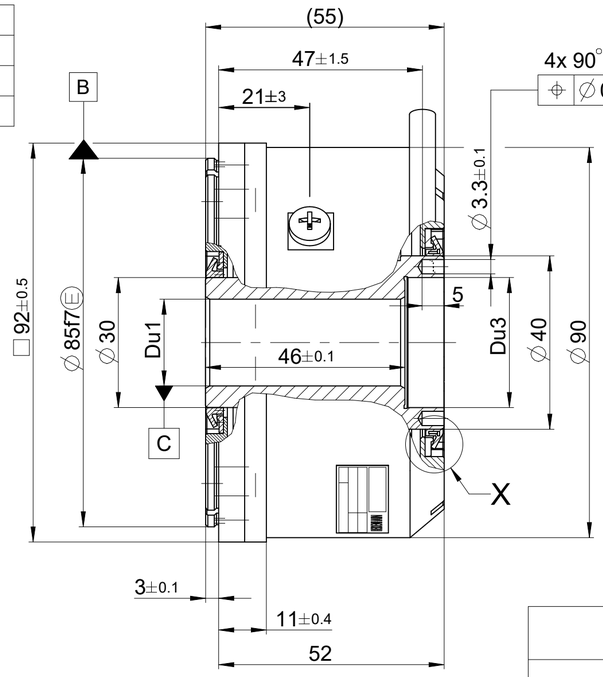

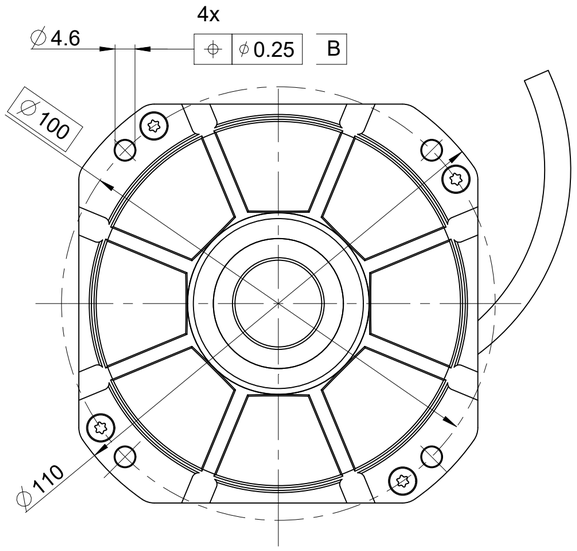

	RCN 22x RON2x7 2,5"	RCN 22x RON 2x5 5"
Du1	⌀20H6 (E)	⌀20H7 (E)
	⌀22H6 (E)	⌀22H7 (E)
Du2	⌀20g6 (E)	⌀20g7 (E)
	⌀22g6 (E)	⌀22g7 (E)
Du3	⌀30H6 (E)	⌀30H7 (E)
T	0.01	0.02

Darstellung gültig für Kappen -und Flanschseite

IP64	IP40
	

X 3:1

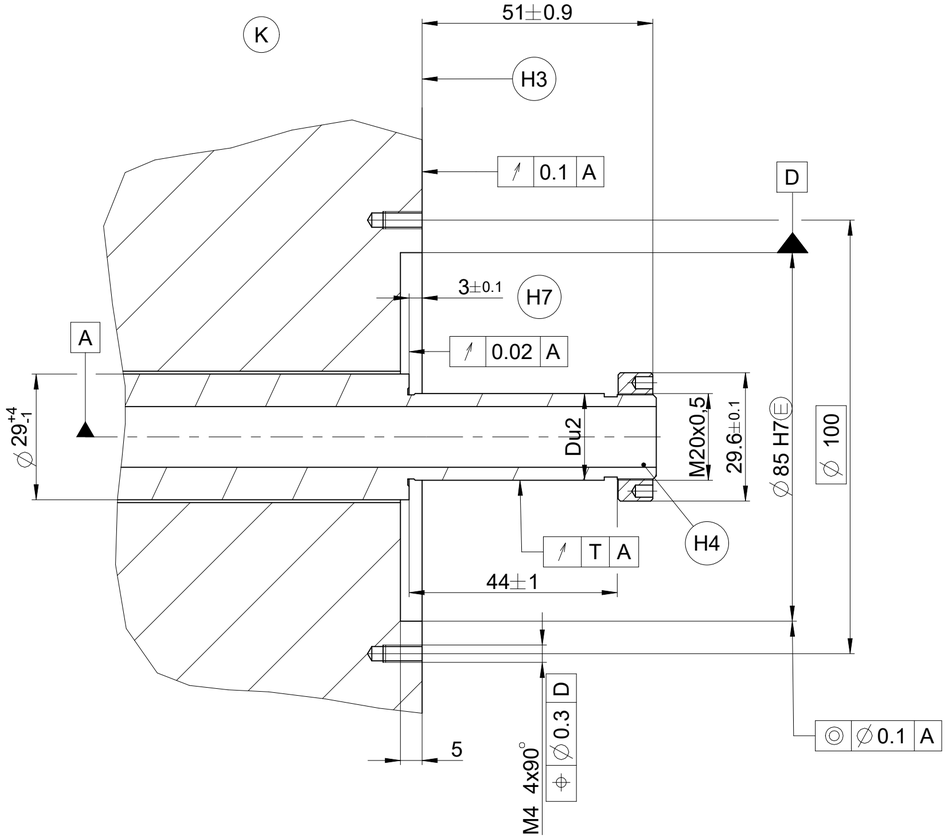



1:1



1:1

A = Lagerung Kundenwelle — Bearings for customer shaft

K = Kundenseitige Anschlußmaße — Required mating dimensions

H1 = Biegeradius bei Dauerbiegebeanspruchung R > 75 — bend radius for frequent flexing R > 2.9528"
Biegeradius bei einmaliger Biegung R > 20 — bend radius for rigid configuration R > 0.7874"

H2 = Druckluftanschluß — Compressed air inlet

H3 = RON 2xx / RCN 22x - Anschraubfläche — RON 2xx / RCN 22x - Securing face

H4 = Ringmutter — Ring nut

H6 = Markierung der 0° Position ± 5° (RCN)
Position des Referenzsignals ± 5° (RON) — 0° position index ± 5° (RCN)
position reference mark ± 5° (RON)

H7 = Toleranzangabe beinhaltet Montagetoleranzen und thermische Ausdehnungen.
Keine dynamische Bewegung zulässig. — Tolerance specification includes mounting tolerances and thermal expansion.
No dynamic movement permitted.

886 200 A2

ID number:
Change No. C195683-10
Phase: Serie

Original drawing | Scale 1:1 | Format A2 | Dimensions in mm

RON 2xx / RCN 22x
RON 2xx / RCN 22x
Anschlussmaße / Mating Dimensions

Tolerances as per ISO 8015
General Tolerances ISO 2768:1989-mH ≤ 6mm: ±0,2

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design. (ISO 16016)

HEIDENHAIN
DR. JOHANNES HEIDENHAIN GmbH
83301 Traunreut, Germany

Released 26.02.2026

Version	Revision	Sheet	Page
D	361129-18	- A-01	1 of 1

Document number