


(K)

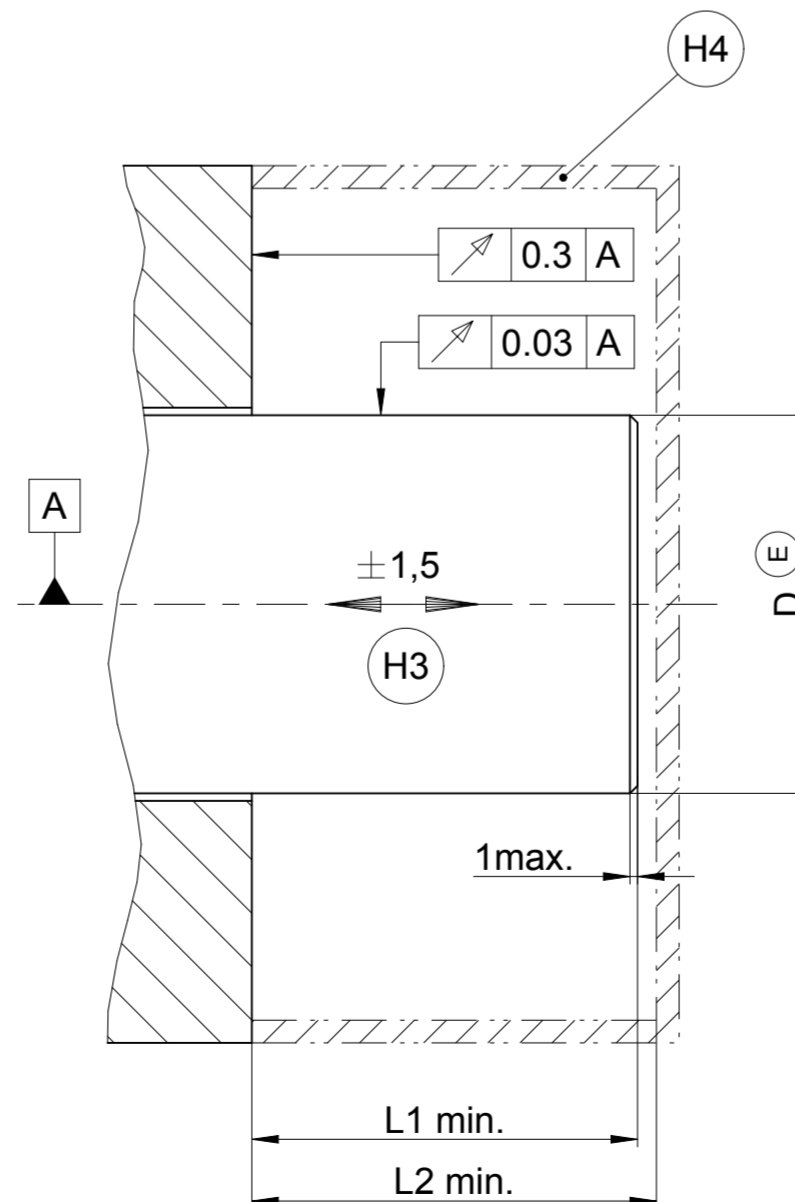

- (A) = Lagerung Kundenwelle  
Bearing for customer shaft
- (K) = Kundenseitige Anschlussmaße  
Required mating dimensions
- (M) = Messpunkt Arbeitstemperatur  
Operating temperature measuring point
- (H1) = Nullposition ± 15°  
Zero position ± 15°
- (H2) = Klemmelement SW 3,0 (3x120°) Md= 2,5 +0,5Nm  
Locking element SW 3,0 (3x120°) Md= 2,5 +0,5Nm
- (H3) = Ausgleich von Montagetoleranzen und thermischer Ausdehnung,  
keine dynamische Bewegung  
Compensation of mounting tolerances and thermal expansion,  
no dynamic motion
- (H4) = Berührungsschutz nach EN 60529  
Protection according to EN 60529

Ø 50h7	56	58,5	55	47	42D	32C	30A	1SS08
Ø 38h7	56	58,5	55	47	42C			
Ø 25h7	41	43,5	40	32	42B	33C		
Ø 20h7	41	43,5	40	32	42A			
D	L1	L2	L3	L4	WELLA1	FLANA1	KUPPA1	ANELA1

Original drawing				ECN 125				ID number:							
Scale				ECN 125				Change No. C006799-15							
Format				Anschlussmaße / Mounting Dimensions				Phase: Serie							
Dimensions in mm				1:1 A2				Tolerierung nach DIN ISO 8015							
								Allgemeintol. ISO 2768-mH ±6mm:±0,2							
								General tol. ISO 2768-mH ±6mm:±0,2							
The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design. (ISO 16016)															
<b>HEIDENHAIN</b> DR. JOHANNES HEIDENHAIN GmbH 83301 Traunreut, Germany								Version		Revision		Sheet		Page	
D 820121-01-A-01												1		1	
Document number															