


**Lochkreisdurchmesser 28mm**  
**Bolt-hole circle diameter 28mm**

**Montagebohrung**  
**Mounting hole**

4x M2,5  
 Anzugsmoment  $0,45 \pm 0,05$  Nm  
 Torque  $0,45 \pm 0,05$  Nm

Mindestens 3,5mm tragende Gewindelänge  
 Load-bearing thread length at least 3,5mm

Sacklochbohrung oder Gewinde gedichtet  
 Blind hole or thread sealed

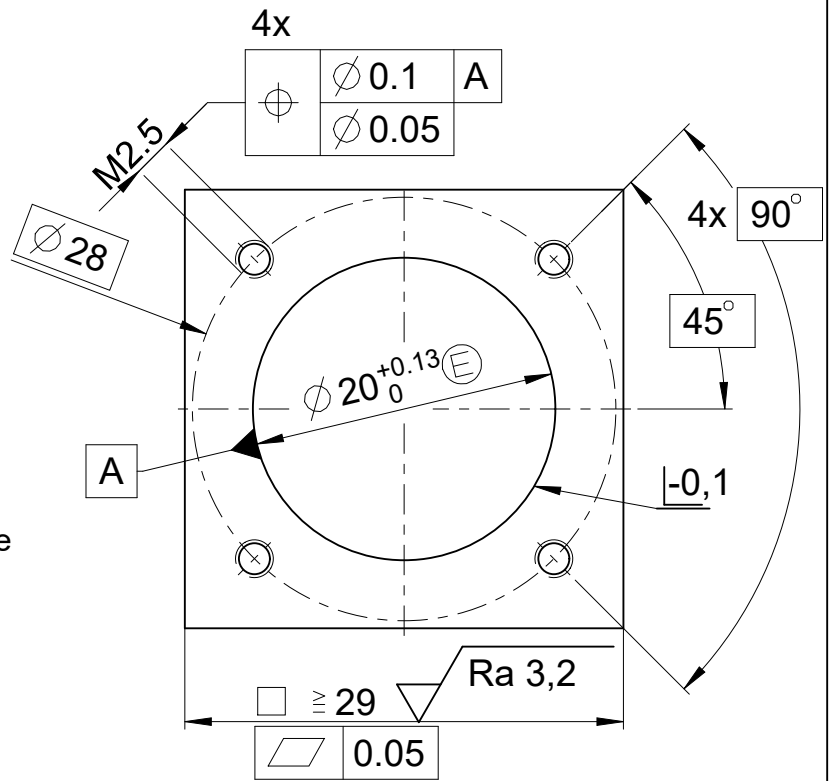


**Lochkreisdurchmesser 32mm**  
**Bolt-hole circle diameter 32mm**

**Montagebohrung**  
**Mounting hole**

4x M3  
 Anzugsmoment  $0,8 \pm 0,05$  Nm  
 Torque  $0,8 \pm 0,05$  Nm

Mindestens 3,5mm tragende Gewindelänge  
 Load-bearing thread length at least 3,5mm

Sacklochbohrung oder Gewinde gedichtet  
 Blind hole or thread sealed

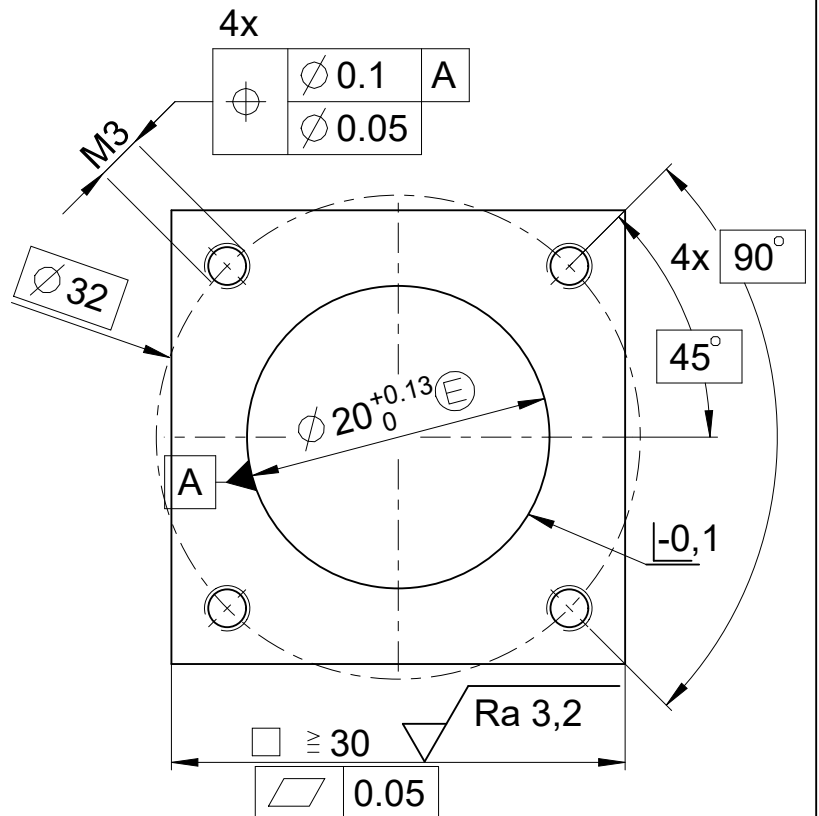

886 200 A4



			ID number:
			Change No. C098663-15
			Phase: Serie
Original drawing Scale   Format 2:1   A4			Tolerierung nach DIN ISO 8015 Tolerances as per DIN ISO 8015
			Allgemeintol. ISO 2768-mH $\leq 6$ mm: $\pm 0,2$ General tol. ISO 2768-mH $\leq 6$ mm: $\pm 0,2$
Montagebohrung LKD 28mm - M2,5 // LKD output cable Anschlussmaße / Mating Dimensions			

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design. ( ISO 16016 )