





$U_P = 5V \pm 5\%$
(I max. 130 mA)






EN 50 178/4.98; 5.2.9.5
IEC 364-4-41: 1992; 411(PELV/SELV)



A, B, R
C, D

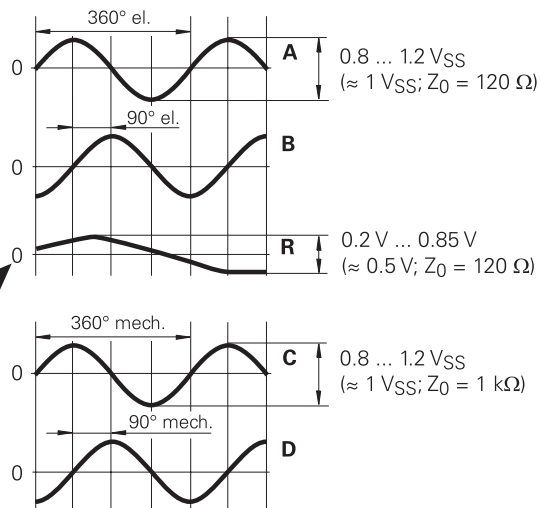

DIN EN 100 015 – 1
CECC 00015 – 1

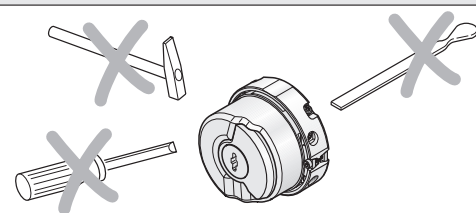


HEIDENHAIN

安装手册
Montageanleitung
Mounting Instructions


ERN 1387

7/2005

ERN 1387 ← 62S14-70

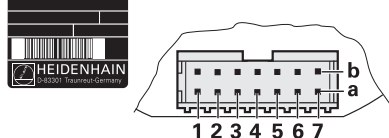

1b	7a	5b	3a	6b	2a	3b	5a	4b	4a	7b	1a	2b	6a
U_P	Sensor U_P	0 V	Sensor 0 V	A+	A-	B+	B-	R+	R-	C+	C-	D+	D-

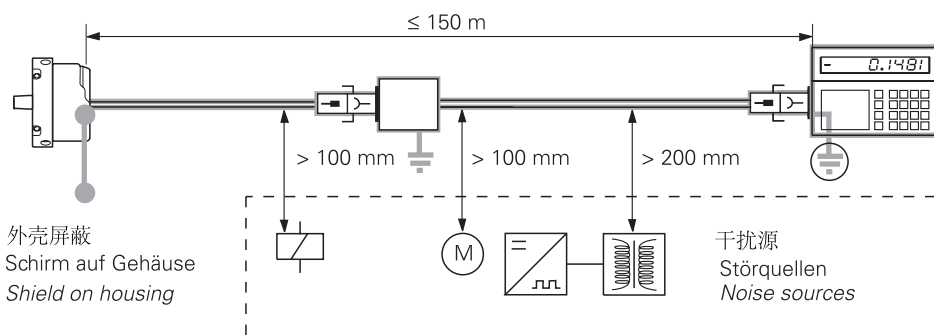

DR. JOHANNES HEIDENHAIN GmbH

Dr.-Johannes-Heidenhain-Straße 5

83301 Traunreut, Germany

☎ +49 (8669) 31-0

FAX +49 (8669) 5061

E-Mail: info@heidenhain.de

Technical support ☎ +49 (8669) 31-1000

Measuring systems ☎ +49 (8669) 31-3104

E-Mail: service.ms-support@heidenhain.de

TNC support ☎ +49 (8669) 31-3101

E-Mail: service.nc-support@heidenhain.de

NC programming ☎ +49 (8669) 31-3103

E-Mail: service.nc-pgm@heidenhain.de

PLC programming ☎ +49 (8669) 31-3102

E-Mail: service.plc@heidenhain.de

Lathe controls ☎ +49 (711) 952803-0

E-Mail: service.hsf@heidenhain.de

www.heidenhain.de

Ve 00

533 398-Z0 · 12/2006 · Printed in Germany

Änderungen vorbehalten · Subject to change without notice





ERN 1387

尺寸 mm
Maße in mm
Dimensions in mm

[A] = 轴承
Lagerung
Bearing

Ⓚ = 配合尺寸
Kundenseitige Anschlussmaße
Required mating dimensions

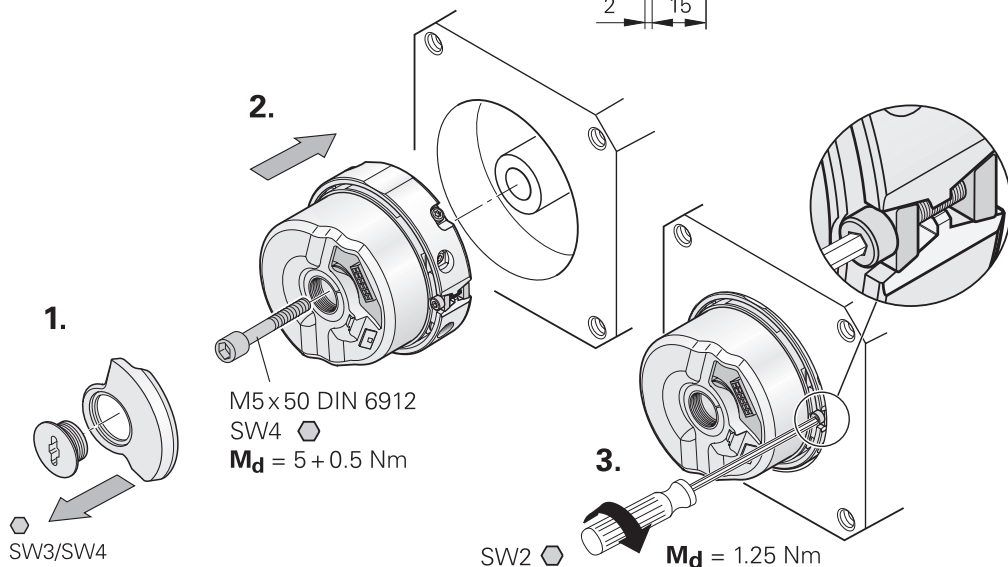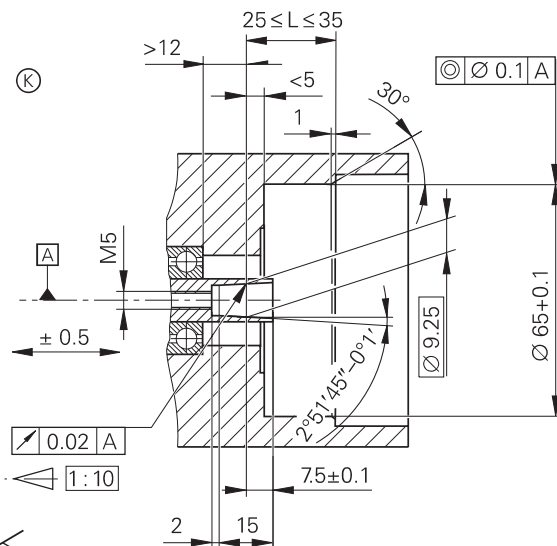


$\varnothing 4.5$ mm	$R_1 \geq 18$ mm	/
$\varnothing 8$ mm	$R_1 \geq 40$ mm	$R_2 \geq 100$ mm

	$^\circ\text{C}$ $(^\circ\text{F})$
	$-30 \dots 80$ $^\circ\text{C}$ $(-22 \dots 176$ $^\circ\text{F})$

电气连接

Elektrischen Anschluss herstellen
Electrical connection

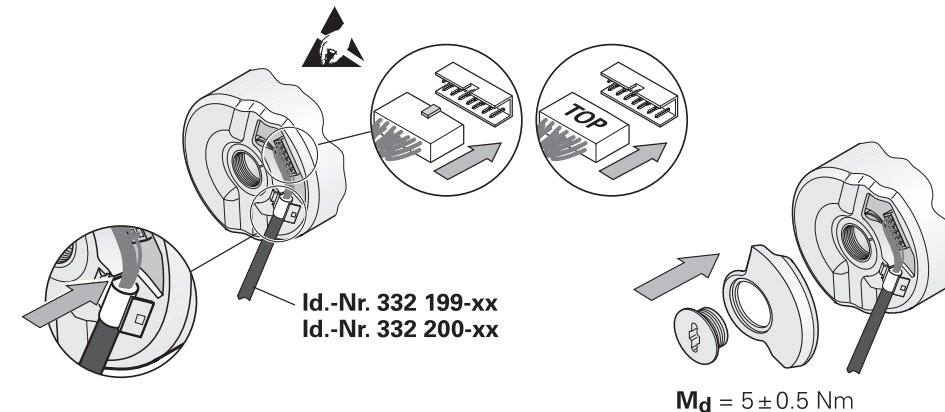

将电缆插入到位并固定
Kabel einclicken und auf Anschlag schieben
Click cable into place, and push it in as far as possible

拆卸编码器的两种方法

Zwei Möglichkeiten zur Demontage des Drehgebers
Two possibilities for dismantling the encoder

